

The MADP150/450/816 is a full spectrum multiband VHF, UHF, 700/800/900MHz antenna designed for today's latest P25 Land Mobile Radios (LMR) for maritime, military, commercial, public safety, and law enforcement applications.

The radiator elements are designed for maximum durability and performance. The antenna radiator is sealed in heavy duty fiberglass for mechanical stability and reliability in harsh environments.

Being ground independent, this antenna can be mounted on various platforms (metal or non-metal) with no degradation of performance.

Features


- Ground independent
- Single Input
- Built to MIL-STD-810

Electrical Specifications

Frequency	136-174MHz 380-520MHz 762-870MHz
Polarization	Vertical
Impedance	50Ω Nominal
VSWR	≤2.0:1 Typical <3.0:1 Max band edges
Gain	+2 to +3dBi ±.5
Pattern	Omni Directional
Power	100 Watts
Connector	12" pigtail w/Type N Female

Mechanical Specifications

Design	Dipole
Height	41.25in. (1.05m)
Diameter	2¼" (57.15mm)
Radome	Fiberglass
Weight	5.5lbs. (2.5kg.)
Wind load	150MPH Max (241kph)
Operating Temperature	-40° to 85°C
Mounting	1" 14 Thread—Extension sold separate
Color	White/Black/Green/Tan/Grey

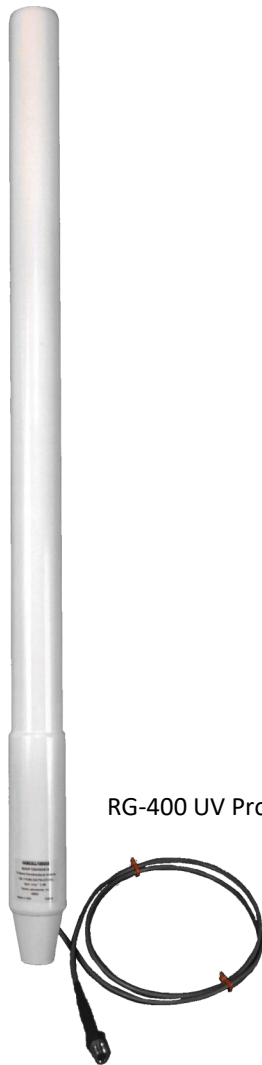

RG-400 UV Protected Pigtail



**All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.
**Specifications are subject to change without prior notice.

