


Tactical Deployable Antenna



The TDMP2X15 and TDMP3X10 are rugged transportable tactical antennas that can be erected in a minimal space. The basic antenna kit comes with eight 4 ft. (1.22 m) sections of fiberglass radiators that screw together. Two 50 ft. (15.24 m) ground radials and three guying rope assemblies plus all other hardware required.

Model Number	Description
TDMP2X15 & TDMP3X10	Kit requiring a tuner (user supplied)
TDMP2X15AB & TDMP3X10AB	Kit with waterproof tuner. (200 Watts or up to 1 KW)
TDMP2X15AC & TDMP3X10AC	Kit with broadband matching which requires no tuner

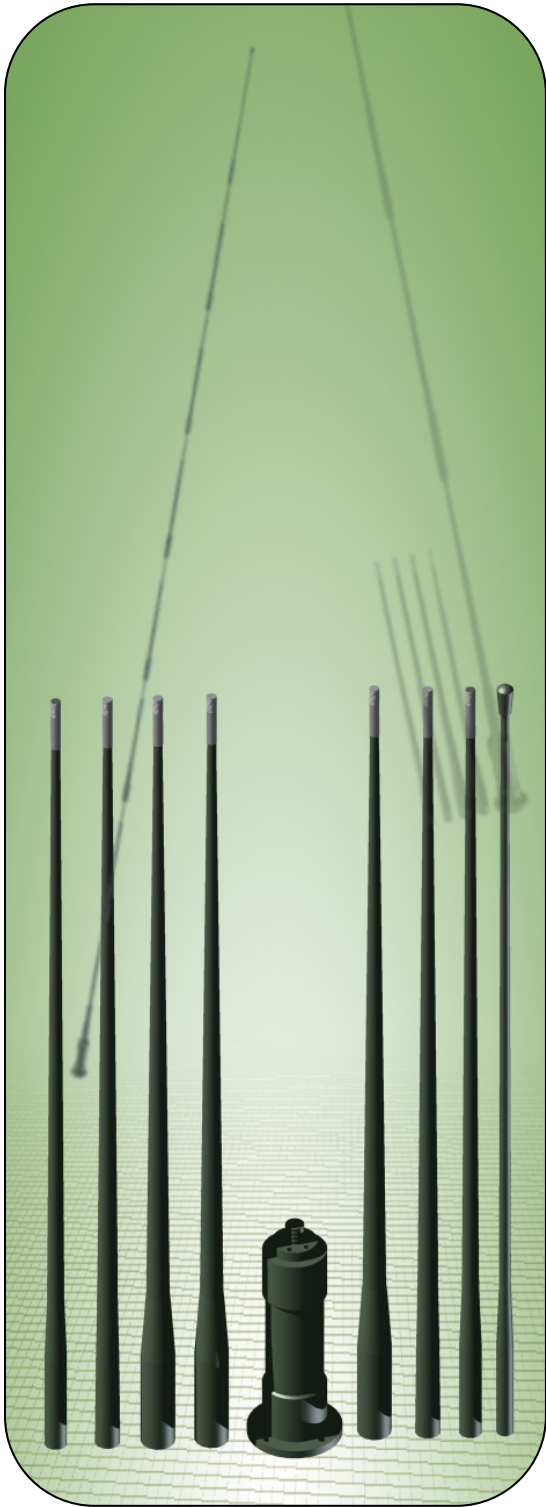

Tactical Deployable Antenna

Specifications

ELECTRICAL:

Frequency Range:	2-30 & 3-30 MHz
Input Impedance:	50 Ω Nominal
Power:	1 kilowatt CW
Polarization:	Vertical
Radiation Pattern:	Omnidirectional

MECHANICAL:

Operational Temps:	-58° to +176°F (-50° to +80°C)
Maximum Wind Load:	80 mph (129 km/h)
Ground Plane:	4X 50 ft. (15.24 m) Radials
Color:	Black/Green/Tan/Grey
Environmental:	For all weather environments.

****All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.**

****Specifications are subject to change without prior notice.**



Made in the USA
ISO 9001:2008 Certified
(1Y0)

P.O. Box 909, Palmetto, Florida 34220-0909
Tel: 941-723-2833 • Fax: 941-723-1628
www.hascall-denke.com