

The MPMP225-380 antenna is designed with a state of the art matching unit for maximum efficiency. Built robust and tough, this antenna is constructed from corrosion resistant material for reliability in the harshest environments and also designed to meet the rigors of MIL-STD-810.



**Features**

- Flexible
- Lightweight
- Concealable

**Electrical Specifications**

Frequency	225-380MHz
Polarization	Vertical
Impedance	50Ω
VSWR	3.0:1 Max
Gain	+1.5 to +2dBi measured on 7.5" x 4" aluminum chassis
Pattern	Omni Directional Azimuth 360° Elevation 72°
Power	10 Watts
Connector	TNC-M

**Mechanical Specifications**

Design	Monopole
Height	12.25in.
Radome	Flexible Whip
Weight	1.52oz.
Color	Black


\*\*All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.

\*\*Specifications are subject to change without prior notice.



Antenna Comparison 225-380 MHz

**Gain**

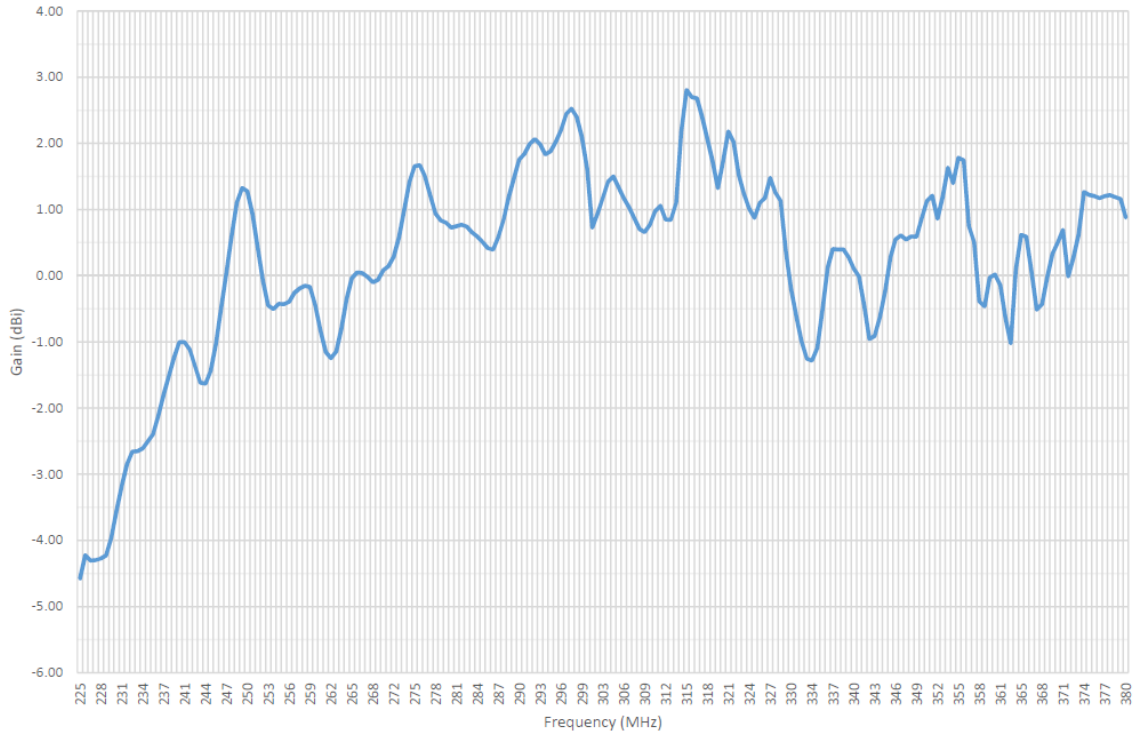

MPMP250-380

**VSWR**

