


Broadband Base Station Antenna

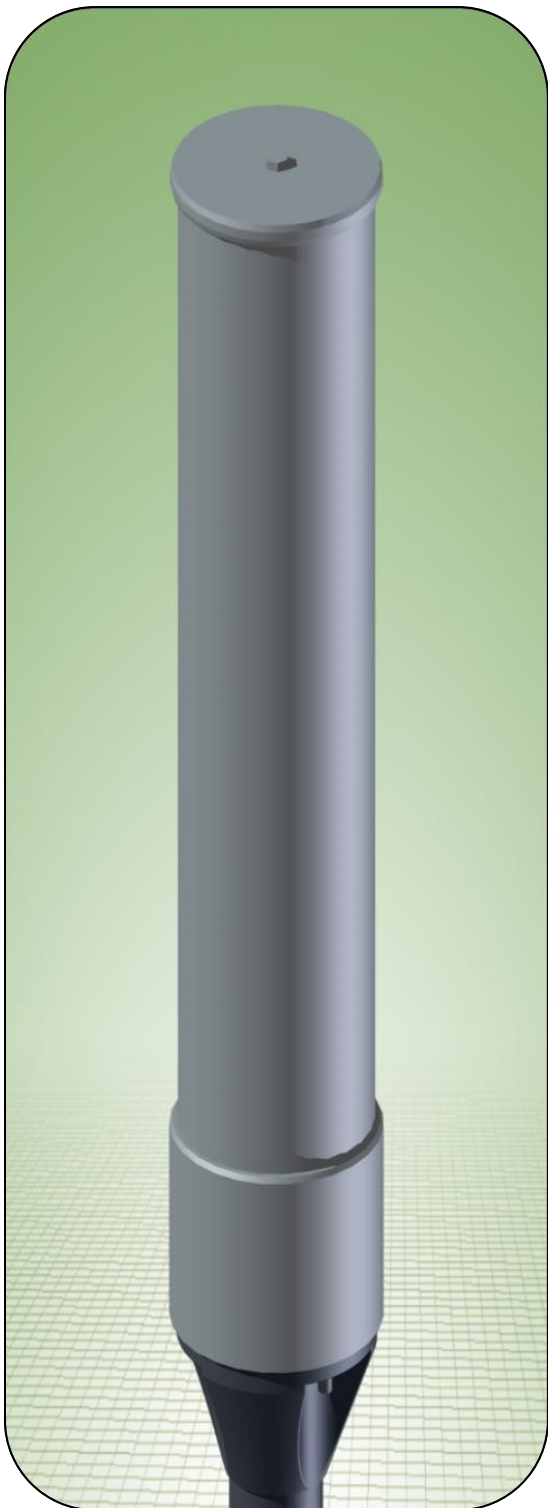

The FXDP225X2 is designed for excellent omnidirectional coverage throughout the VHF band of 225-400 MHz. The antenna requires minimum mounting space for where mounting “real estate” is limited.

This antenna is very popular for aviation control tower operations.

- **Low VSWR**
- **Robust Construction**



Broadband Base Station Antenna

Specifications

ELECTRICAL:

Frequency Range:	225-400 MHz
VSWR:	1.5:1 Nominal
Input Impedance:	50 Ω Nominal
Polarization:	Omnidirectional
Radiation Pattern:	Azimuth: 360° Elevation: 90°
Input Connector:	Type N Female

MECHANICAL:

Overall Height:	29.5 in. (0.75 m)
Net Weight:	8 lb. (3.62 kg)
Color:	Black/Green/Tan/Grey
Mounting:	Three 5/16-18 UNC Threaded Bolts

**All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.

**Specifications are subject to change without prior notice.



Made in the USA
ISO 9001:2008 Certified
(1Y00675)

P.O. Box 909, Palmetto, Florida 34220-0909
Tel: 941-723-2833 • Fax: 941-723-1628
www.hascall-denke.com