

The MADP30X17AE is a broadband dipole antenna designed to be used in military, private or commercial applications where reliability is needed most.

The upper whip may be removed for lower physical signature (lower height) with minimal degradation in electrical performance in the lower frequencies

Features

- 30-512 MHz Continuous
- 100 Watts
- Robust construction
- Low VSWR
- Ground Independent

Electrical Specifications

Frequency	30-512 MHz
Polarization	Vertical
Impedance	50 Ω Nominal
VSWR	3.5:1 Max (Except at crossover band.)
Gain	-8 dBi @30 MHz/ 2 dBi @88 MHz/ 3 dBi @116 MHz/ 3 dBi @512 MHz
Radiation Pattern @ Mid Band	Azimuth 360° Elevation 90°
Power	100 Watts CW
Connector	Single Type N Female (Dual Input Available)

Mechanical Specifications

Design	Dipole
Height	89 in. (2.26 m)
Weight	8 lb. (3.63 kg)
Mount	NATO Standard Four .5" (12.7 mm) Holes, equally spaced on a 4.5" (114.3 mm) Dia. BHC
Color	Black/Green/Tan/Grey




**All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.

**Specifications are subject to change without prior notice.




Pattern


VERTICAL GAIN PATTERN 30 MHz

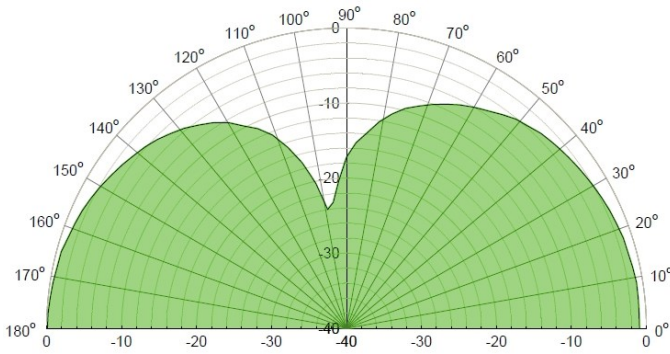

VERTICAL GAIN PATTERN 450 MHz

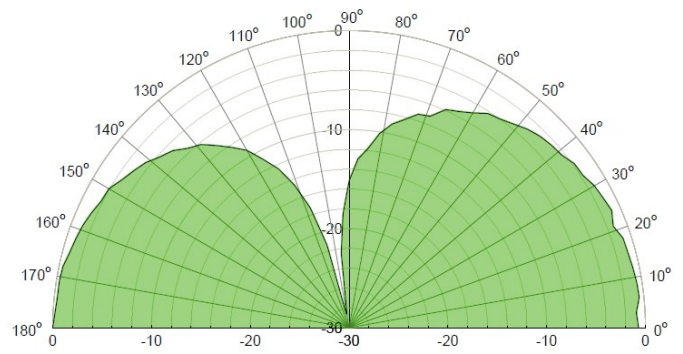

Gain

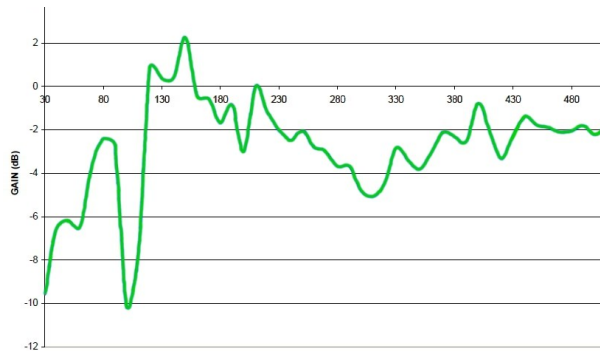

VSWR

