


Omnidirectional Antenna

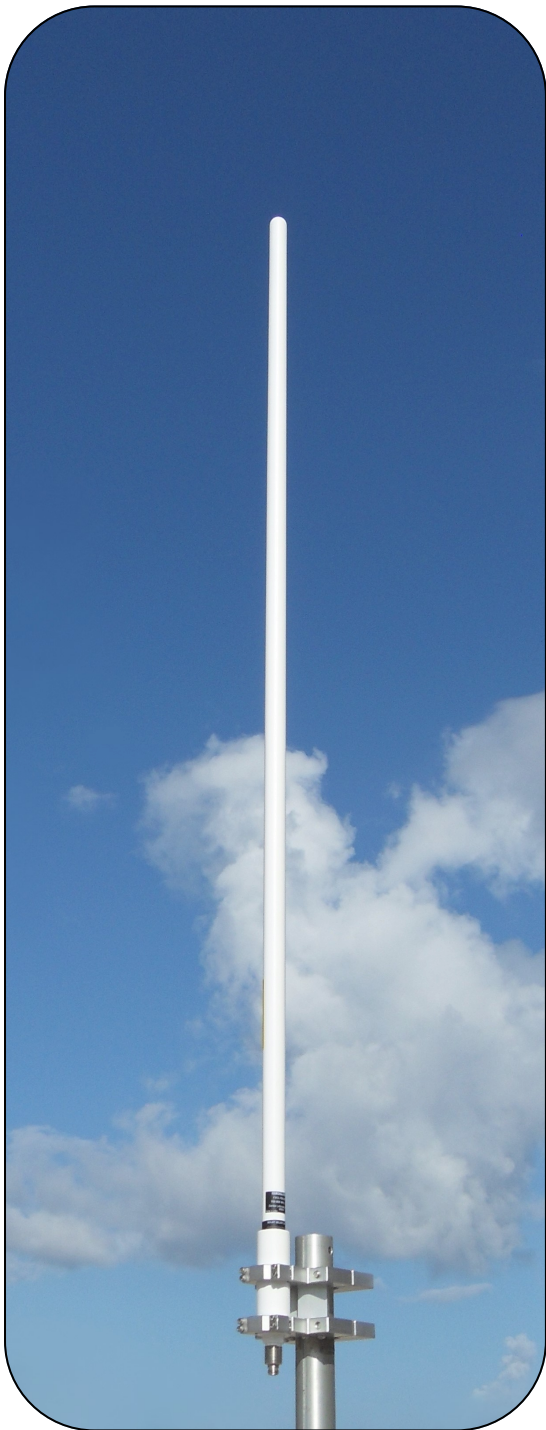

The FXCL750-800-9 antenna is designed to be used in military, commercial, and other applications where reliability is needed most. This antenna works with all radios within the 750-800 MHz band.

Being “ground independent”, this antenna can be used on all types of structures (metal or non-metal) with no degradation in performance.

The antenna is provided with state-of-the-art radiating elements essential for maximum reliability and superior performance.

Robust and tough, this antenna is housed in a thick fiberglass radome double reinforced at the base and is constructed from corrosion resistant materials for reliability in the harshest environments.



Omnidirectional Antenna

Specifications

ELECTRICAL:

Frequency Range:	750-800 MHz
Gain:	9 dBi +/- .5
VSWR:	2.0:1 Typical
Input Impedance:	50 Ω Nominal
Power:	25 Watts
Polarization:	Vertical
Radiation Pattern:	Azimuth: 360° Elevation: 20°
Input Connector:	Type N Female

MECHANICAL:

Overall Height:	75 in. (1.9 m)
Radome Diameter:	1.25 in. (31.8 mm)
Maximum Wind Load:	150 mph (241 km/h)
Net Weight:	3.4 lb. (1.54 kg)
Operational Temps:	-40° to +185°F (-40° to +85°C)
Color:	White

****All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.**

****Specifications are subject to change without prior notice.**



Made in the USA
ISO 9001:2008 Certified
(1Y25950)

P.O. Box 909, Palmetto, Florida 34220-0909
Tel: 941-723-2833 • Fax: 941-723-1628
www.hascall-denke.com