

The MPDP806-960/1710-1900-4 antenna was designed for today's latest Land Mobile Radio (LMR) and Long Term Evolution (4G/LTE) communications platforms for military, commercial, public safety and law enforcement applications.

The antenna has a state-of-the-art radiating element that provides maximum reliability and maximum performance.

**Features**

- Ground Independent
- Single Input
- Built to meet MIL-STD-810
- High Gain



**Electrical Specifications**

Frequency	806-960 MHz & 1710-1990 MHz
Polarization	Vertical
Impedance	50 Ω Nominal
VSWR	3:1 Max 2.5:1 Typical Operational
Gain	4 dBi +/- .5
Radiation Pattern	Azimuth 360° Elevation 25° - 37°
Power	25 Watts
Connector	Type N Male

**Mechanical Specifications**


Design	Dipole
Height	28 in. (0.71 m)
Weight	1.5 lb. (0.68 kg)
Color	Black/Green/Tan/Grey

**\*\*All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.**


**\*\*Specifications are subject to change without prior notice.**



**Pattern**

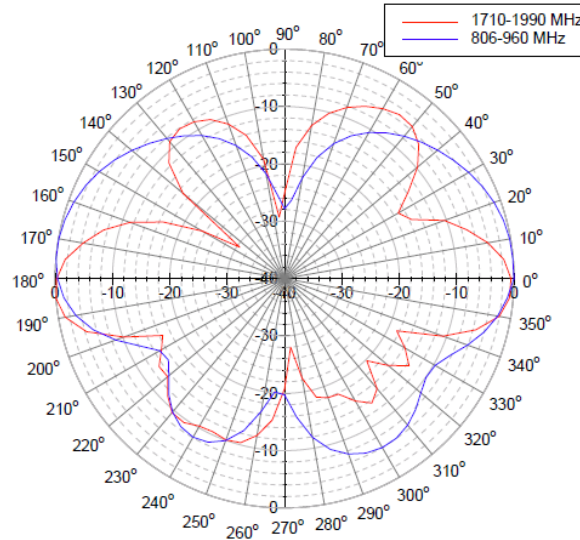

**Gain**

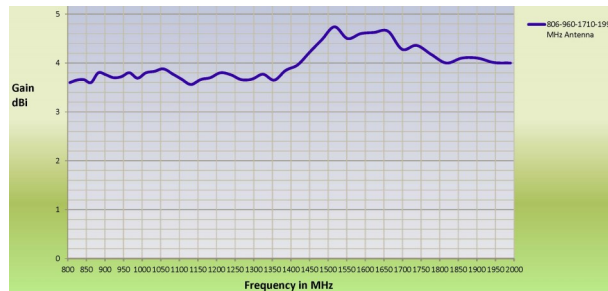

**VSWR**

