

The MPMP136-174 is designed to provide maximum performance and superior reliability over a stock antenna. This antenna is able to operate in 2 different positions, allowing the operator to adjust the antenna to suit their needs. See the table on second page to ensure you are ordering the antenna that fits your radio.

Extended
 Provides ~3dBi increase in gain compared to the stock antenna

Folded Above Antenna Base
 Suitable for short range communications.



Features

- Foldable Radiator
- Operates in folded position
- Extends range
- Robust construction

Electrical Specifications

Frequency	136-174 MHz
Polarization	Vertical
Impedance	50 Ω Nominal
VSWR	< 2:1
Gain	See description next to pictures
Radiation Pattern	Azimuth 360°
Power	10 Watts
Connector	See table on 2nd page



Mechanical Specifications

Design	Monopole
Weight	3.1 oz (88 grams)
Height	20.5 in. (0.53 m)
Radio	See table on 2nd page
Color	Black

**All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.

**Specifications are subject to change without prior notice.



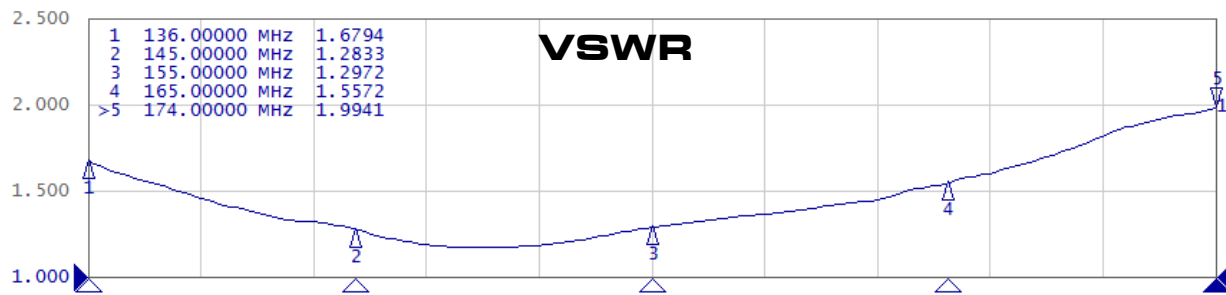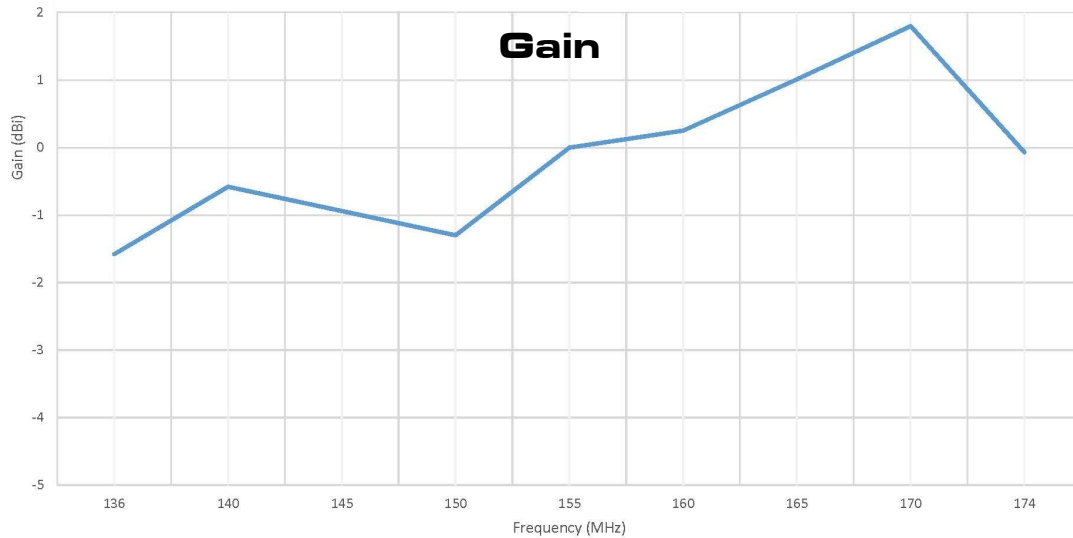

Antenna Part #	Antenna Model #	Compatible Radios
1Y52800	MPMP136-174	KENWOOD (NX-210, NX-5200, TK-2312)
1Y52800A	MPMP136-174AB	ICOM (F3400)
1Y52800B	MPMP136-174AC	ICOM (F3161, F3261, F1100, M85)
1Y52800C	MPMP136-174AD	Harris XG-100 & Tait TP8000 & TP9000
1Y52800D	MPMP136-174AE	TNC-Male
1Y52800E	MPMP136-174AF	Harris XL-(200)(185) & XG-(15)(25)(75)
1Y52800F	MPMP136-174AG	Motorola XPR 6000 Series
1Y52800G	MPMP136-174AH	Motorola XPR 7000 Series
1Y52800H	MPMP136-174AI	Motorola APX 6000 7000 8000
1Y52800I	MPMP136-174AJ	Motorola HT750, HT1250, P110, GP300
1Y52800J	MPMP136-174AK	BNC - male
1Y52800K	MPMP136-174AL	Motorola CP040, CP140, CP150, CP160, CP180, CP200, CP400, GP3688, GP3188, EP450

