


Base Station Dual Band Antenna

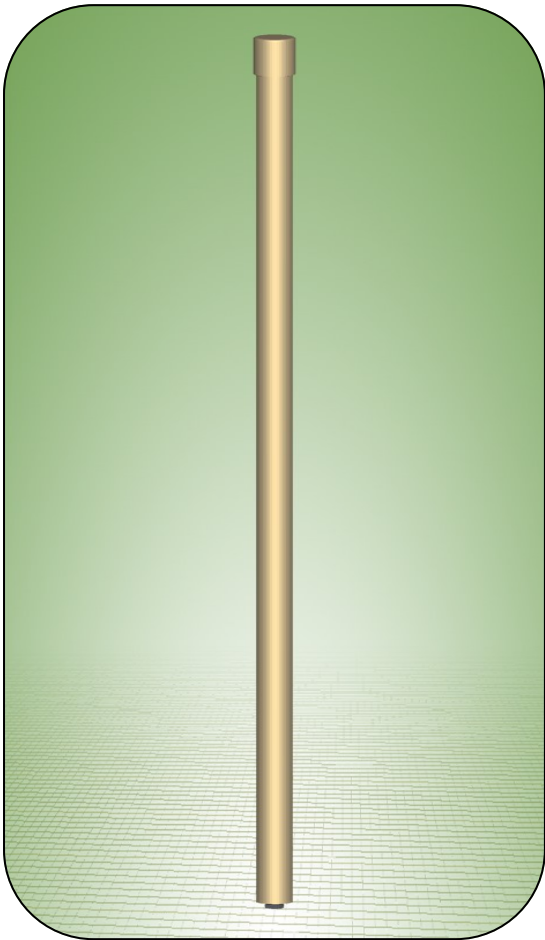

The FXCL920-1785 dual band antenna is designed to be used in military, commercial, and other applications where reliability is needed most. This antenna works with all radios within the 900-940 and 1755-1815 MHz band.

This antenna is provided with state-of-the-art radiating elements essential for maximum reliability and superior performance.

Robust and tough, this antenna is housed in a thick fiberglass radome and is constructed from corrosion resistant materials for reliability in the harshest environments.



Base Station Dual Band Antenna

Specifications

ELECTRICAL:

Frequency Range: 900-940 & 1755-1815 MHz

Gain: 6 ~ 9 dBi

VSWR: 2:1 Typical

Input Impedance: 50 Ω Nominal

Power: 20 Watts

Polarization: Omnidirectional

Radiation Pattern: Azimuth: 360°
Elevation: 30°

Input Connector: Type N Female

MECHANICAL:

Overall Height: 45 in. (1.14 m)

Color: Black/Green/Tan/Grey

Mounting: UM003 Mast Adapter
(Sold Separately)

****All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.**

****Specifications are subject to change without prior notice.**



Made in the USA
ISO 9001:2015 Certified
(1Y06950)

P.O. Box 909, Palmetto, Florida 34220-0909
Tel: 941-723-2833 • Fax: 941-723-1628
www.hascall-denke.com